

Matter Series

User Manual

Smart Downlight / Spotlight



ARRIVAL INSPECTION

- Smart Light × 1
- Smart Light Driver × 1
- Network Pairing QR Code × 1



Figure 1

Light Series Wiring:

Note: The installation of smart downlights and spotlights involves 220V mains power. Installation must be performed by personnel with professional electrical experience!

Before starting any installation steps, be sure to turn off the main power breaker and ensure complete power-off before proceeding with subsequent operations.

Please read this manual carefully before using this product.

- Confirm that the light fixture dimensions match the installation hole diameter (as shown in Figure 2)
- Check whether the light fixture, power cord, and driver (if applicable) are intact and undamaged
- Confirm that the installation surface is made of non-flammable material, and that adequate heat dissipation space is reserved above the light fixture
- According to the standard diameter of the light fixture, accurately cut the hole on the installation surface
- Correctly connect the light fixture's live wire (L) and neutral wire (N) to the power supply, and perform secure and reliable insulation treatment (as shown in Figure 3)
- Use both hands to spread open the spring clips on both sides of the light body, gently push the light body into the cut installation hole, and secure it firmly into the ceiling (as shown in Figure 4)
- After spotlight installation is complete, adjust the beam direction and angle according to lighting requirements

Warning: It is strictly prohibited to cover the light fixture. The light fixture must not be covered by insulation padding or similar materials under any circumstances!

Please read this manual carefully before using this product.

Product Electrical Parameters

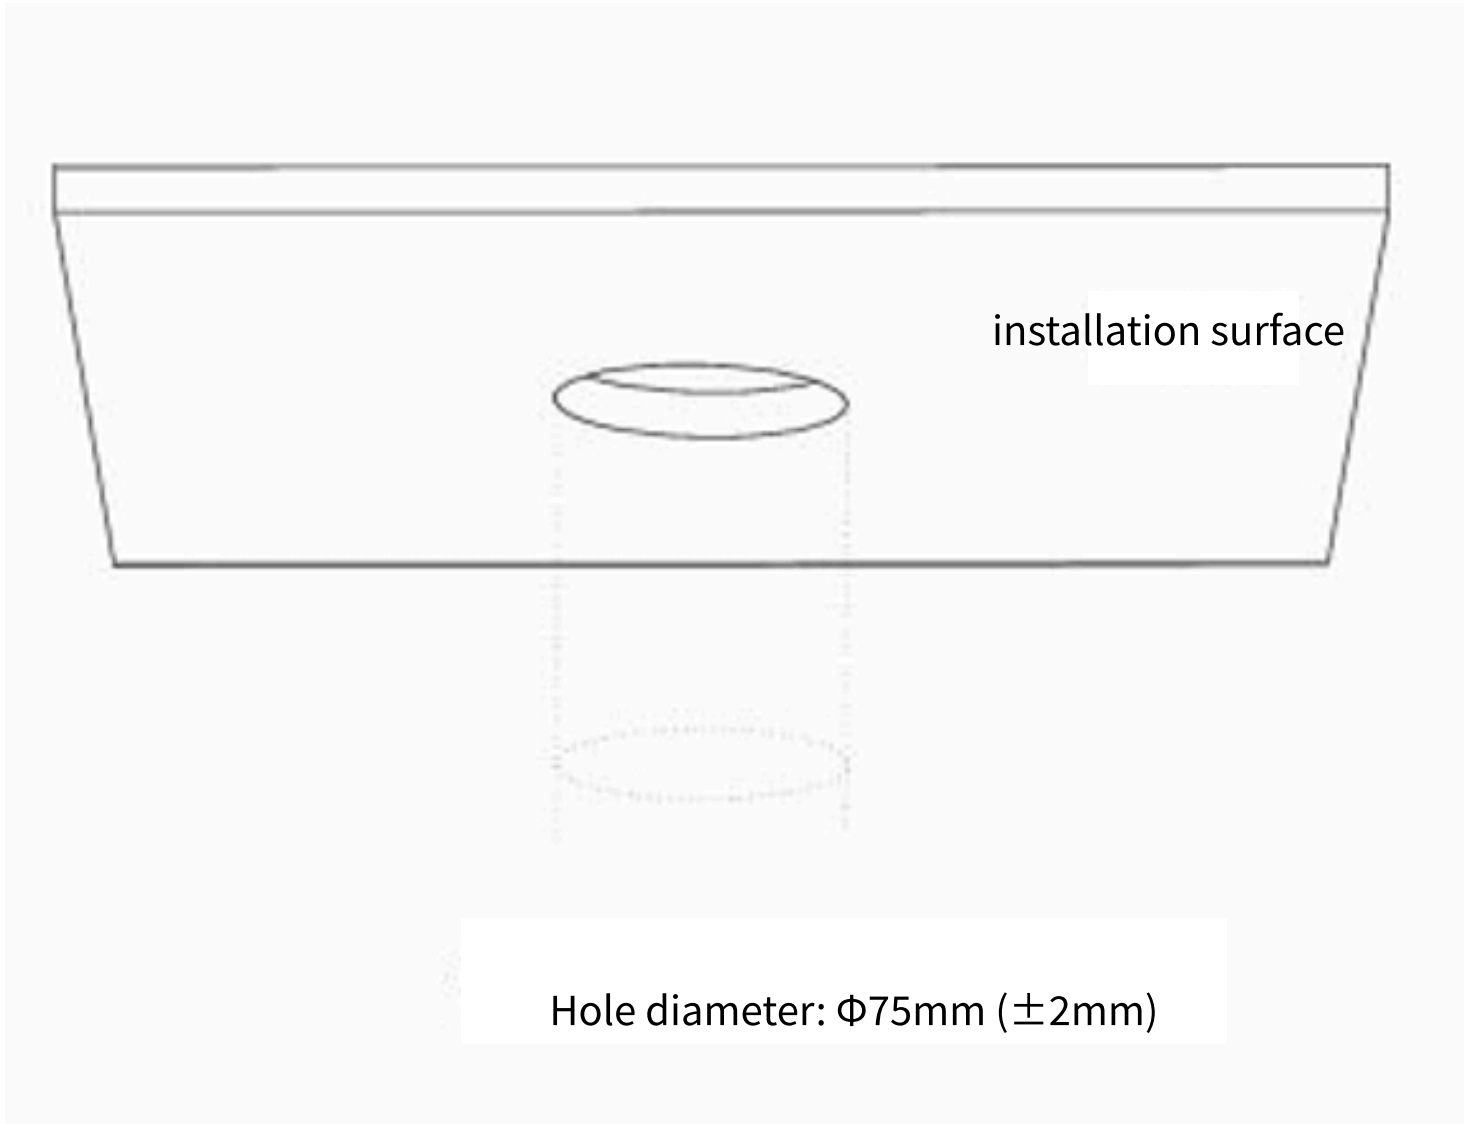


Figure 2

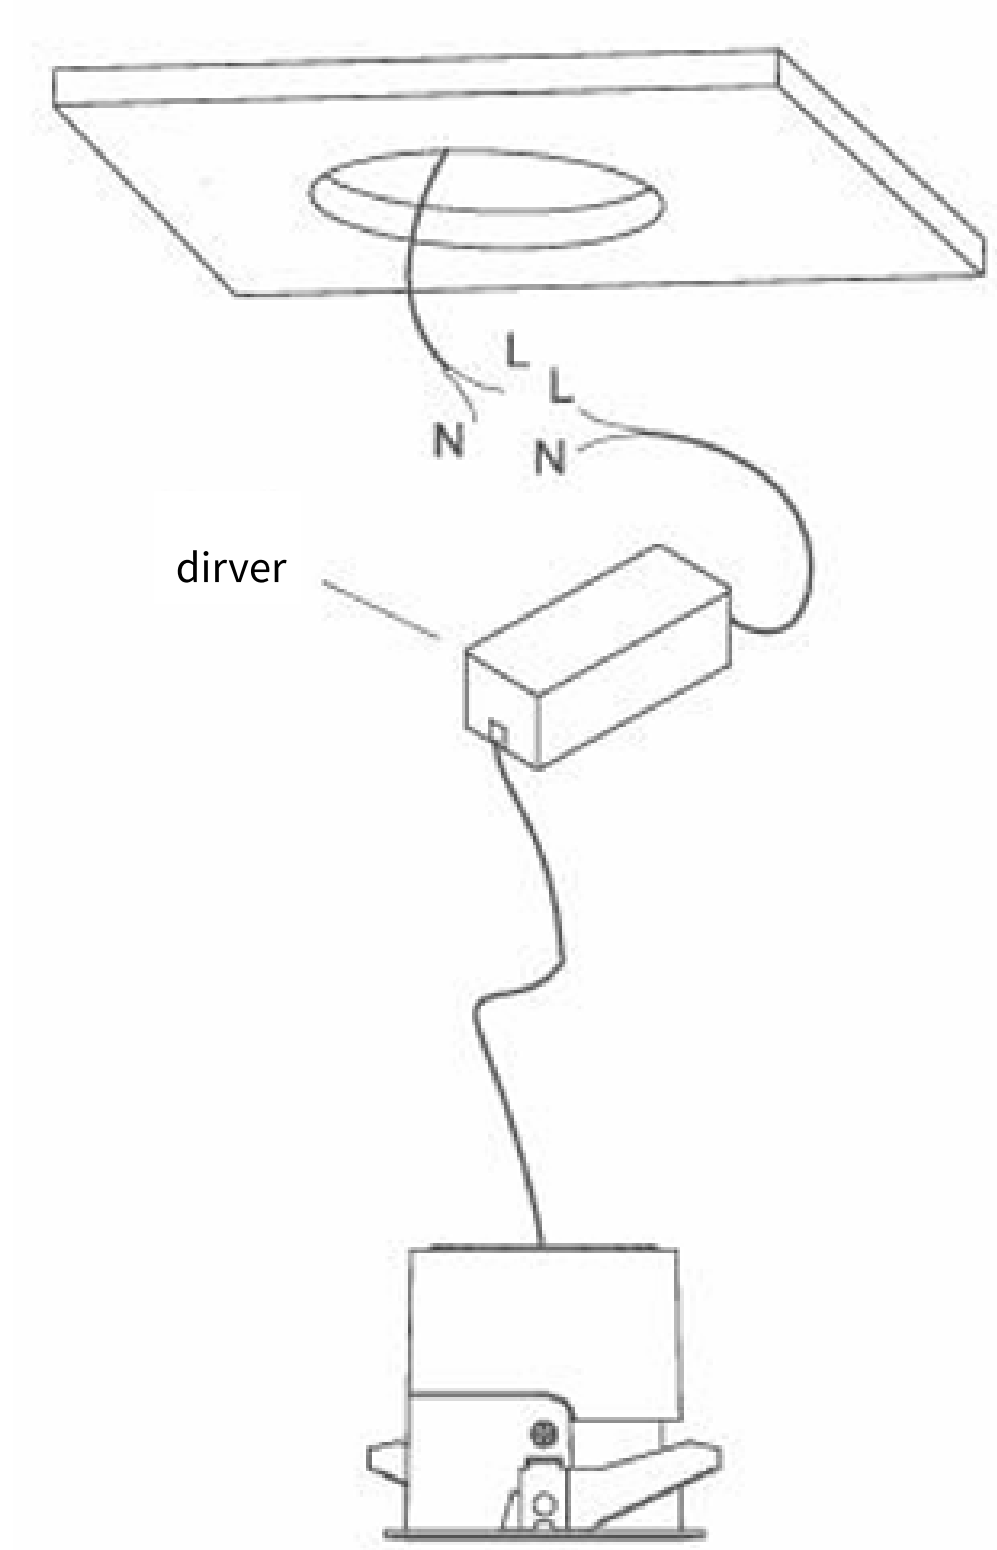


Figure 3

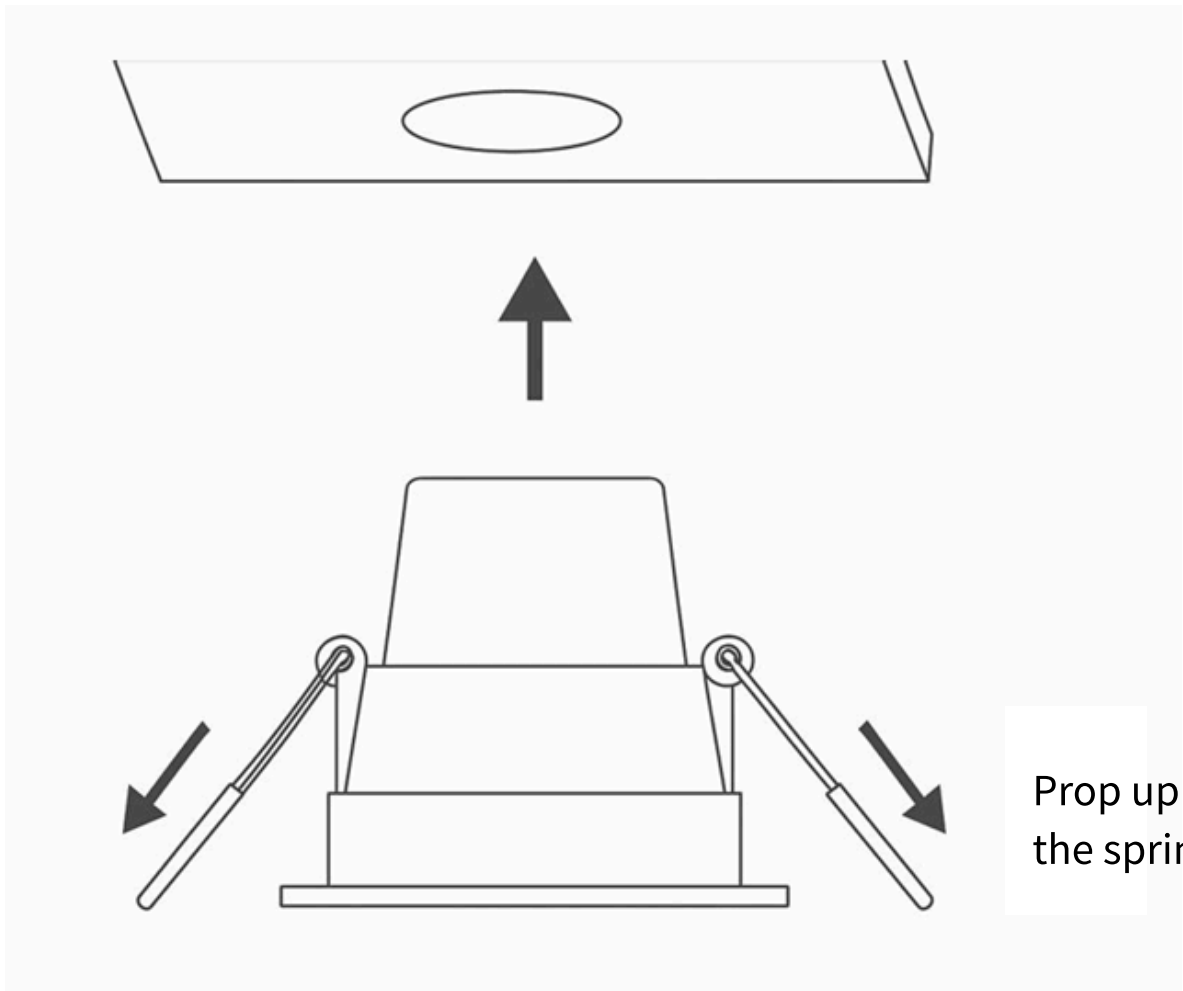


Figure 4

Please read this manual carefully before using this product.

DOWNLIGHT / SPOTLIGHT NETWORK PAIRING

1. Power on the device
2. Open the smart home app on your phone (Google Home, Apple Home, Amazon Alexa, Samsung SmartThings, or other Matter-supported apps) (Figure 5)
3. Use a Matter-supported app to scan the QR code (Figure 6)
4. Or manually enter the setup code
5. Follow the in-app prompts to complete network pairing
6. Done

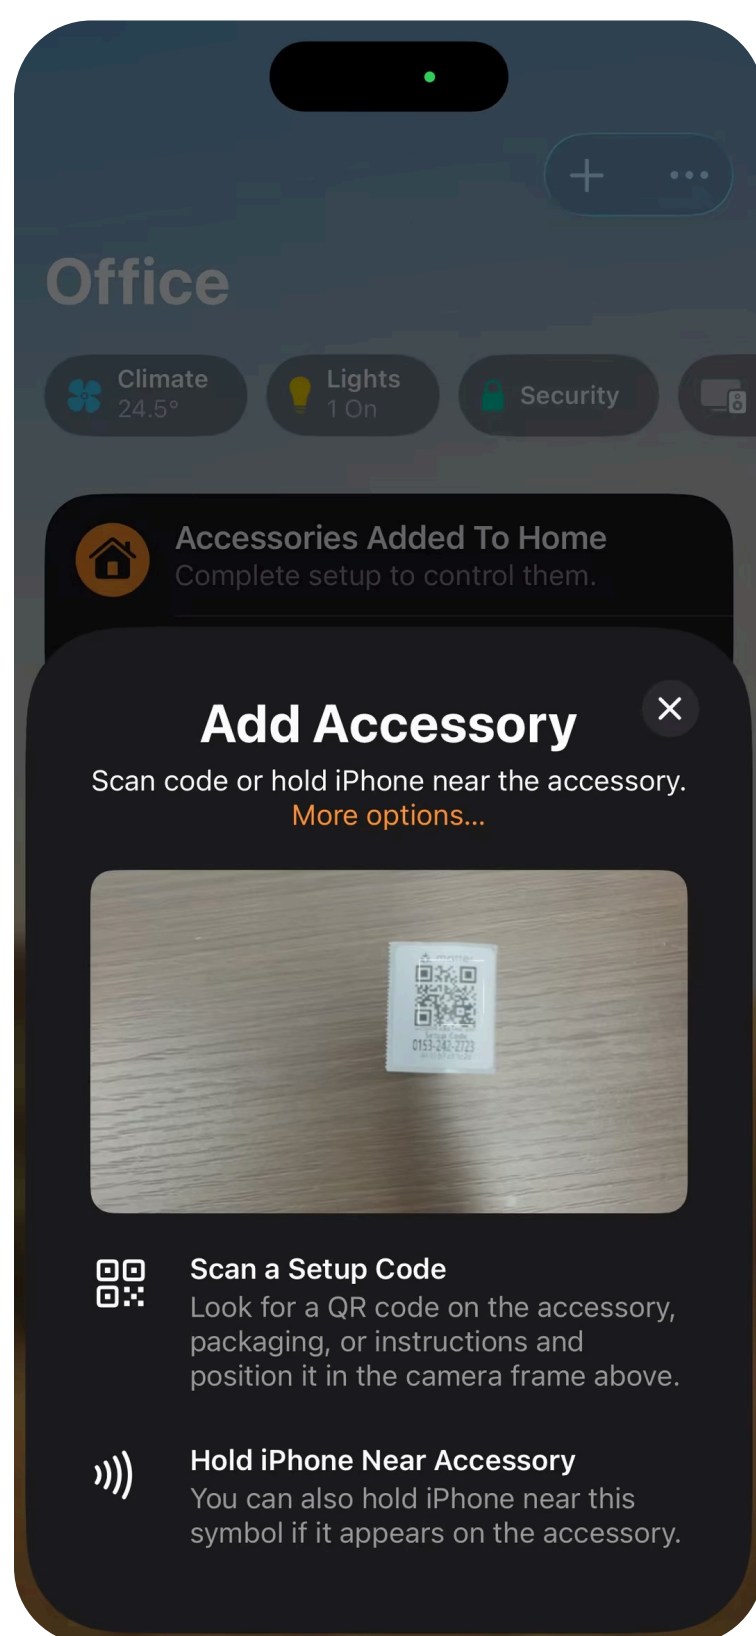


Figure 5

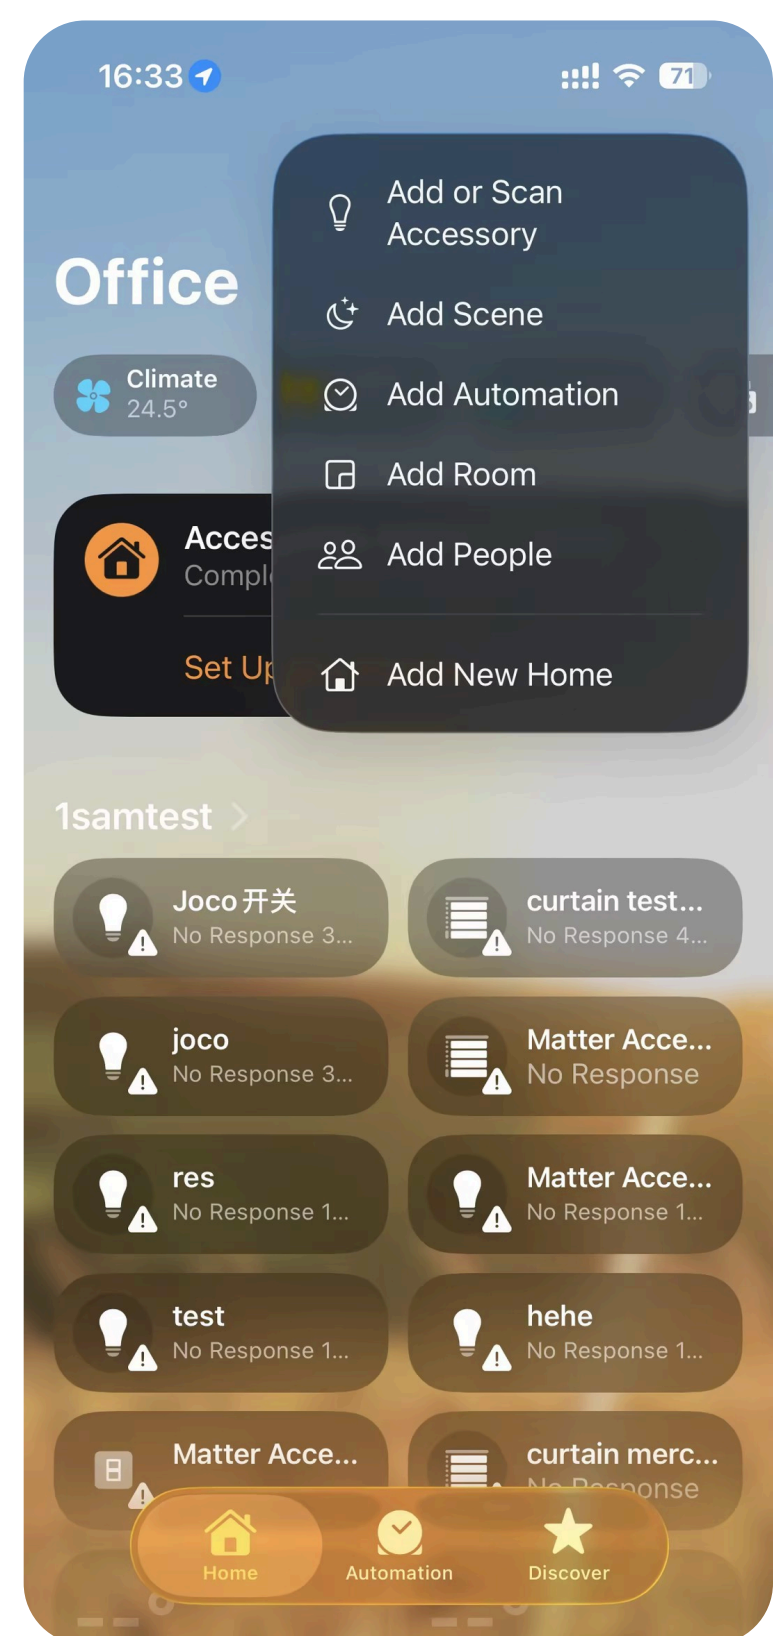


Figure 6

Please read this manual carefully before using this product.

ADAPTIVE LIGHTING SETUP

In the Home app, tap the smart bulb you want to set up for adaptive lighting. This will open the light brightness, color temperature, or color adjustment panel (as shown in Figure 4).

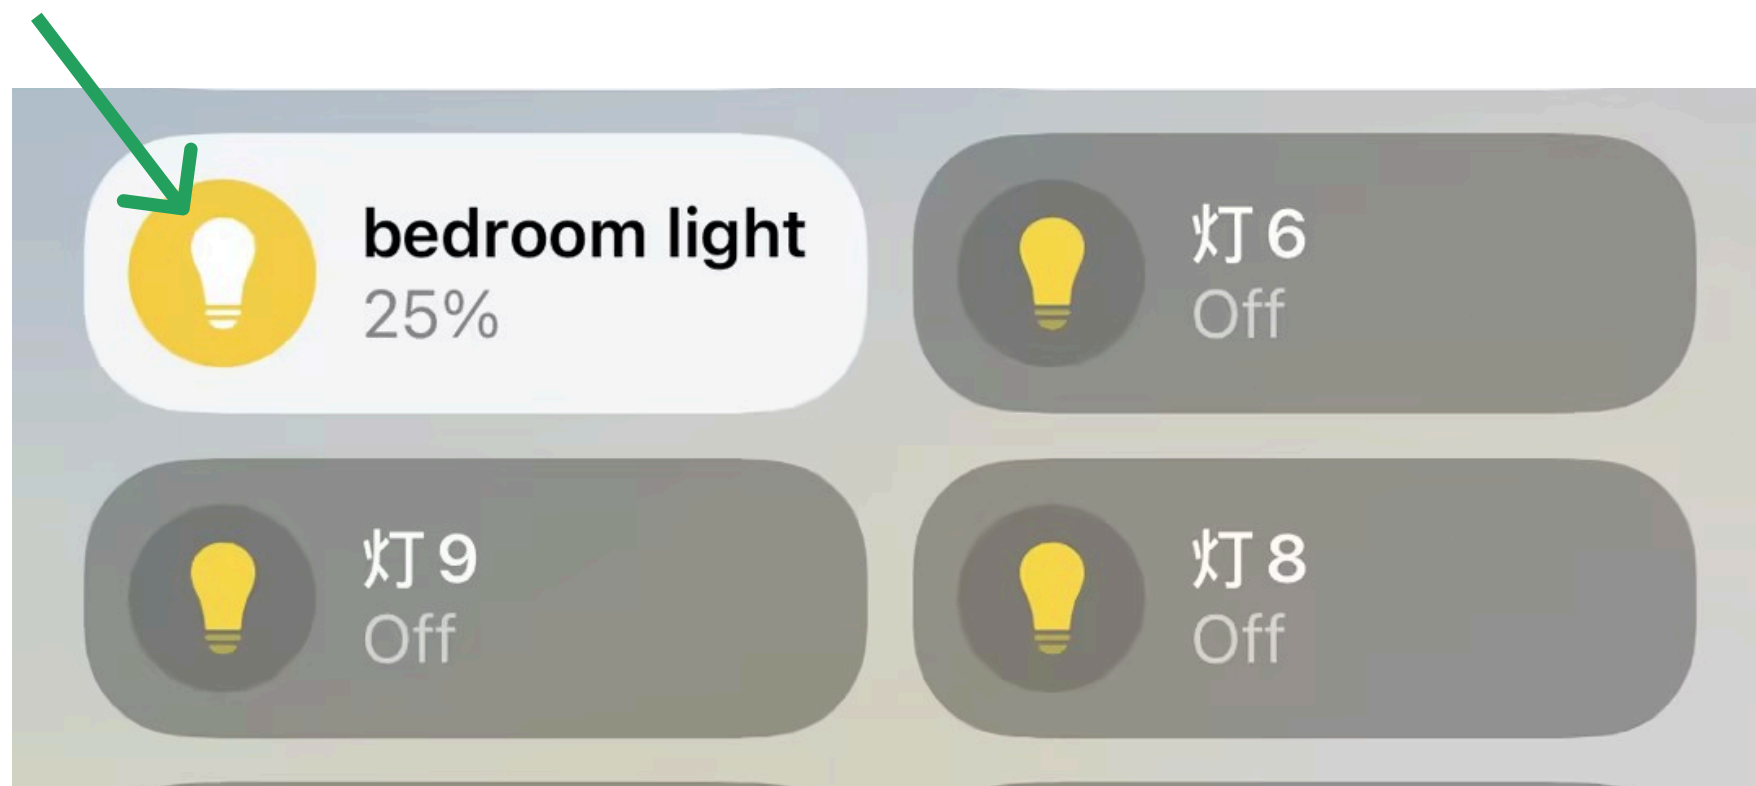


Figure 7

DOWNLIGHT / SPOTLIGHT RESET

1. Connect Light Fixture to Driver

Connect the downlight or spotlight correctly to the light driver, ensuring the wiring is secure and reliable.

2. Connect Power

Insert the driver's power end into a smart socket, and confirm that the socket is in normal power supply status (for cases where installation is not yet complete).

Please read this manual carefully before using this product.

Product Electrical Parameters

3. Perform Reset Operation

While the device is powered on, continuously press the switch button on the smart socket 5–6 times.

If the driver is already connected to the light and the driver is hidden in the ceiling with power supplied, simply locate the actual switch controlling that light, and continuously turn the panel switch on and off.

When you see the downlight or spotlight flash continuously 5 times, the reset is complete.

Thank You

Thank you for using our product. This product is driven by a smart software ecosystem! For more instructions, please refer to the online user documentation.